



BIPRO

TP7G54M
TP7G54M(H) **108-cell**

390 - 410W

10BB


PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



12 25

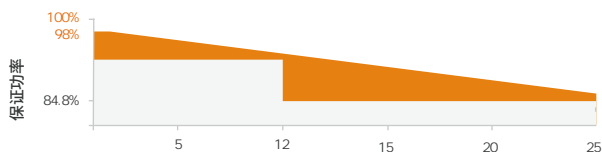

10BB

2%

0.55%



2%



PID

PID
85 /85% RH 192



IP68

| | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT | STC | NMOT |
|----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| (Pmax/W) | 390 | 291 | 395 | 294 | 400 | 298 | 405 | 302 | 410 | 306 |
| (Vmpp/V) | 30.65 | 28.60 | 30.85 | 28.80 | 31.05 | 29.00 | 31.24 | 29.20 | 31.43 | 29.30 |
| (Impp/A) | 12.73 | 10.18 | 12.81 | 10.23 | 12.89 | 10.30 | 12.97 | 10.36 | 13.05 | 10.42 |
| (Voc/V) | 36.50 | 34.40 | 36.75 | 34.60 | 37.00 | 34.80 | 37.25 | 35.10 | 37.50 | 35.30 |
| (Isc/A) | 13.61 | 10.97 | 13.69 | 11.04 | 13.78 | 11.11 | 13.86 | 11.17 | 13.94 | 11.24 |
| (%) | 20.00 | | 20.20 | | 20.50 | | 20.70 | | 21.00 | |

STC : 1000W/m², AM1.5, 25 O~+5W ± 3%
 NMOT() 800W/m² AM1.5 20 1m/s

