



# BISTAR

TP6L60M  
TP6L60M(H) **120-cell**

360 - 380W

9BB PERC



## 产品特性



9BB半片电池技术

2%

0.55%



显著降低热斑风险



优秀的抗PID性能

PID  
Anti  
85 /85% RH 192



更广泛的应用性



IP68接线盒


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



## 质量保证

12

25

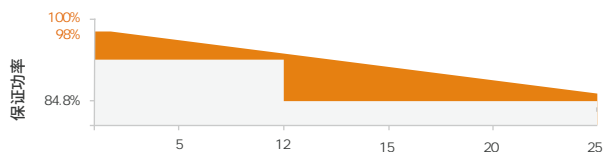

[www.talesun.com](http://www.talesun.com)

marketing.hq@talesun.com

\* GL-CN-Version 2023.09.25

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	19.70		20.00		20.30		20.60		20.90	

	9BB
	120 (6*20)
	1755*1038*30mm (69.09*40.87*1.18 )
	19.5kg (42.99lbs)
	IP68, 3
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

