



# BISTAR

TP7F72M  
TP7F72M(H) **144-cell**

530 - 550W

10BB PERC



## 体系及产品认证


- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015
- ISO 14001: 2015
- ISO 45001: 2018



## 质量保证

12

25

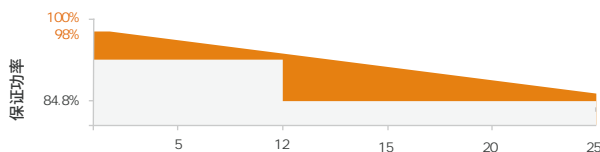

## 产品特性



10BB半片电池技术

2%

0.55%



显著降低热斑风险



更一度电成本

2%



优秀的抗PID性能


PID  
85 / 85% RH 192




IP68接线盒

	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
	530	395	535	398	540	402	545	406	550	410
	41.32	38.6	41.48	38.7	41.64	38.8	41.80	39.0	41.96	39.1
	12.83	10.24	12.90	10.30	12.97	10.36	13.04	10.41	13.11	10.47
	49.32	46.4	49.46	46.5	49.60	46.7	49.76	46.8	49.92	47.0
	13.72	11.06	13.79	11.12	13.86	11.17	13.93	11.23	14.00	11.28
	20.50		20.70		20.90		21.10		21.30	

	10BB
	144 (6*24)
	2278*1134*35mm (89.69*44.65*1.38 )
	28kg (61.73lbs.)
	3.2mm
	IP68, 3
	4mm <sup>2</sup> (IEC), 12AWG(UL) 300mm
	T01/LJQ-3-CSY/MC4/MC4-EVO2

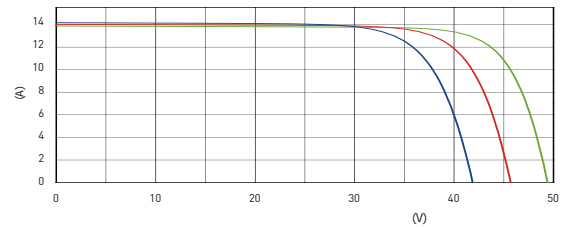

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class

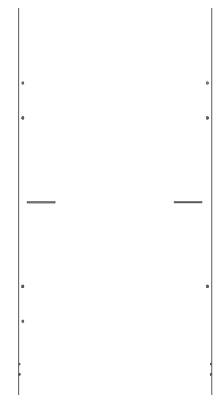

	31	31(USA)
	620	620

