



# BISTAR

TP7F78M  
TP7F78M(H) **156-cell**

**580 - 600W**


10BB PERC



- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 质量管理体系
- ISO 14001: 2015 环境管理体系
- ISO 45001: 2018 职业健康安全管理体系






12 25

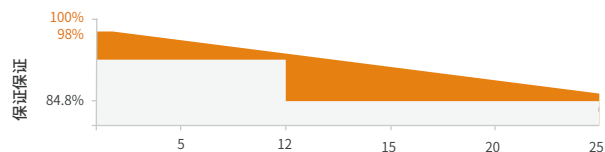

|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |  |

|  |   |
|--|---|
|  | 10BB  |
|  | 156 (6*26)  |
|  | 2465*1134*35mm<br>(97.05*44.65*1.38 )                   |
|  | 31.5kg (69.45lbs.)                                      |
|  | 3.2mm   |
|  |   |
|  | IP68, 3   |
|  | 4mm <sup>2</sup> (IEC), 12AWG(UL)<br>350mm(+), 250mm(-) |
|  | T01/LJQ-3-CSY/MC4/MC4-EVO2                              |

|  |                |
|--|----------------|
|  | 1000V/1500V/DC |
|  | -40°C~+85°C    |
|  | 25A            |
|  | Class          |
|  |                |
|  |                |

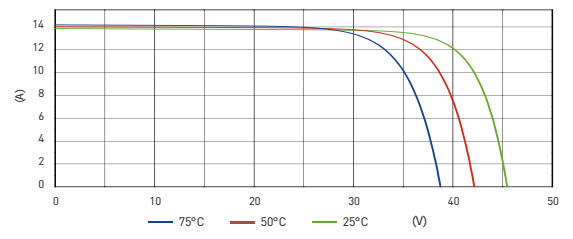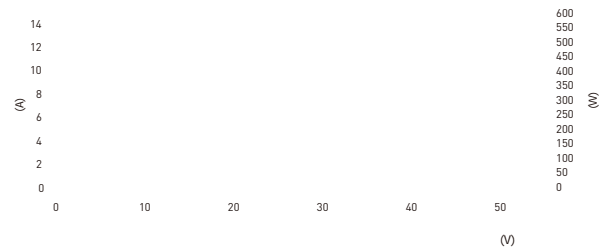

|  |     |         |
|--|-----|---------|
|  | 31  | 31(USA) |
|  | 496 | 496     |

