



FEATHER

TP7F54M
TP7F54M(H) **108-cell**

395 - 415W

10BB Half-cut Mono Perc
Light-weight



SYSTEM & PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730
- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems




PERFORMANCE WARRANTY

12 Years
Quality
Assurance

25 Years
Power Output
Guarantee

Linear Performance Warranty

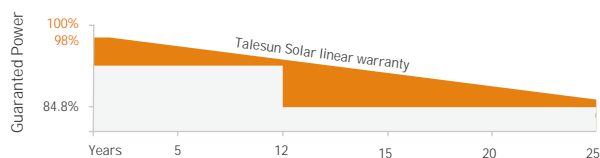

KEY FEATURES



Light-Weight

Reduce roof loads, easy operation, lower installation cost



10BB Half-cut Cell Technology

New circuit design, lower internal current, lower Rs loss
Ga doped wafer, attenuation <2% (1st year) / 0.55% (Linear)



Significantly Lower the Risk of Hot Spot

Special circuit design with much lower hot spot temperature



Excellent Anti-PID Performance

2 times of industry standard Anti-PID test



IP68 Junction Box

High waterproof level

www.talesun.com

marketing.hq@talesun.com

ELECTRICAL CHARACTERISTICS

	395	294	400	298	405	302	410	306	415	310
	30.85	28.8	31.05	29.0	31.24	29.2	31.43	29.3	31.64	29.6
	12.81	10.23	12.89	10.30	12.97	10.36	13.05	10.42	13.13	10.48
	36.75	34.6	37.00	34.8	37.25	35.1	37.50	35.3	37.75	35.5
	13.69	11.04	13.78	11.11	13.86	11.17	13.94	11.24	14.02	11.30
	20.20		20.50		20.70		21.00		21.30	

: C. :
C

MECHANICAL CHARACTERISTICS

	Monocrystalline Silicon (10Busbar)
	108pcs in series (6*18)
	1722*1134*30mm (67.80*44.65*1.18inches)
	16.2kg (35.72lbs.)
	2.0mm AR Coating Tempered Glass
	Anodized Aluminium Alloy
	IP68, 3 Bypass Diodes
	4mm² (IEC), 12AWG(UL) 300mm in Length or Customized Length
	T01/LJQ-3-CSY/MC4/MC4-EVO2

APPLICATION CONDITIONS

	1000V/1500V/DC
	-40°C~+85°C
	25A
	Class II


TEMPERATURE CHARACTERISTICS

	-0.35%/°C
	-0.26%/°C
	+0.048%/°C
	43±2°C

PACKING CONFIGURATION

	36	36(USA)
	936	936

I-V CURVE

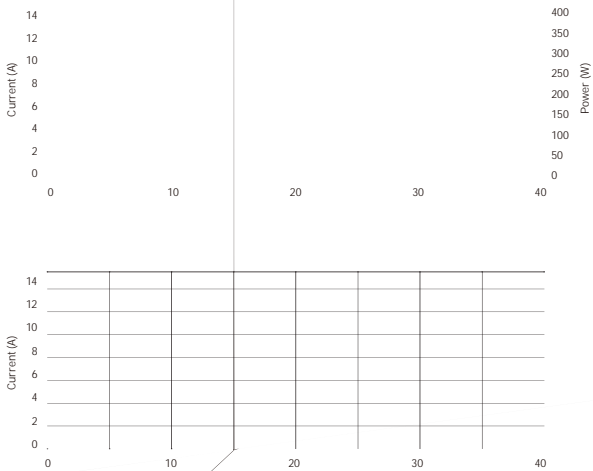

TECHNICAL DRAWINGS



The specification and key features described in this datasheet may deviate slightly and are not guaranteed. Due to ongoing innovation, R&D enhancement, Suzhou Talesun Solar Technologies Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.